


Proposed routing of the Trigger cable
for racks placed Face to Face

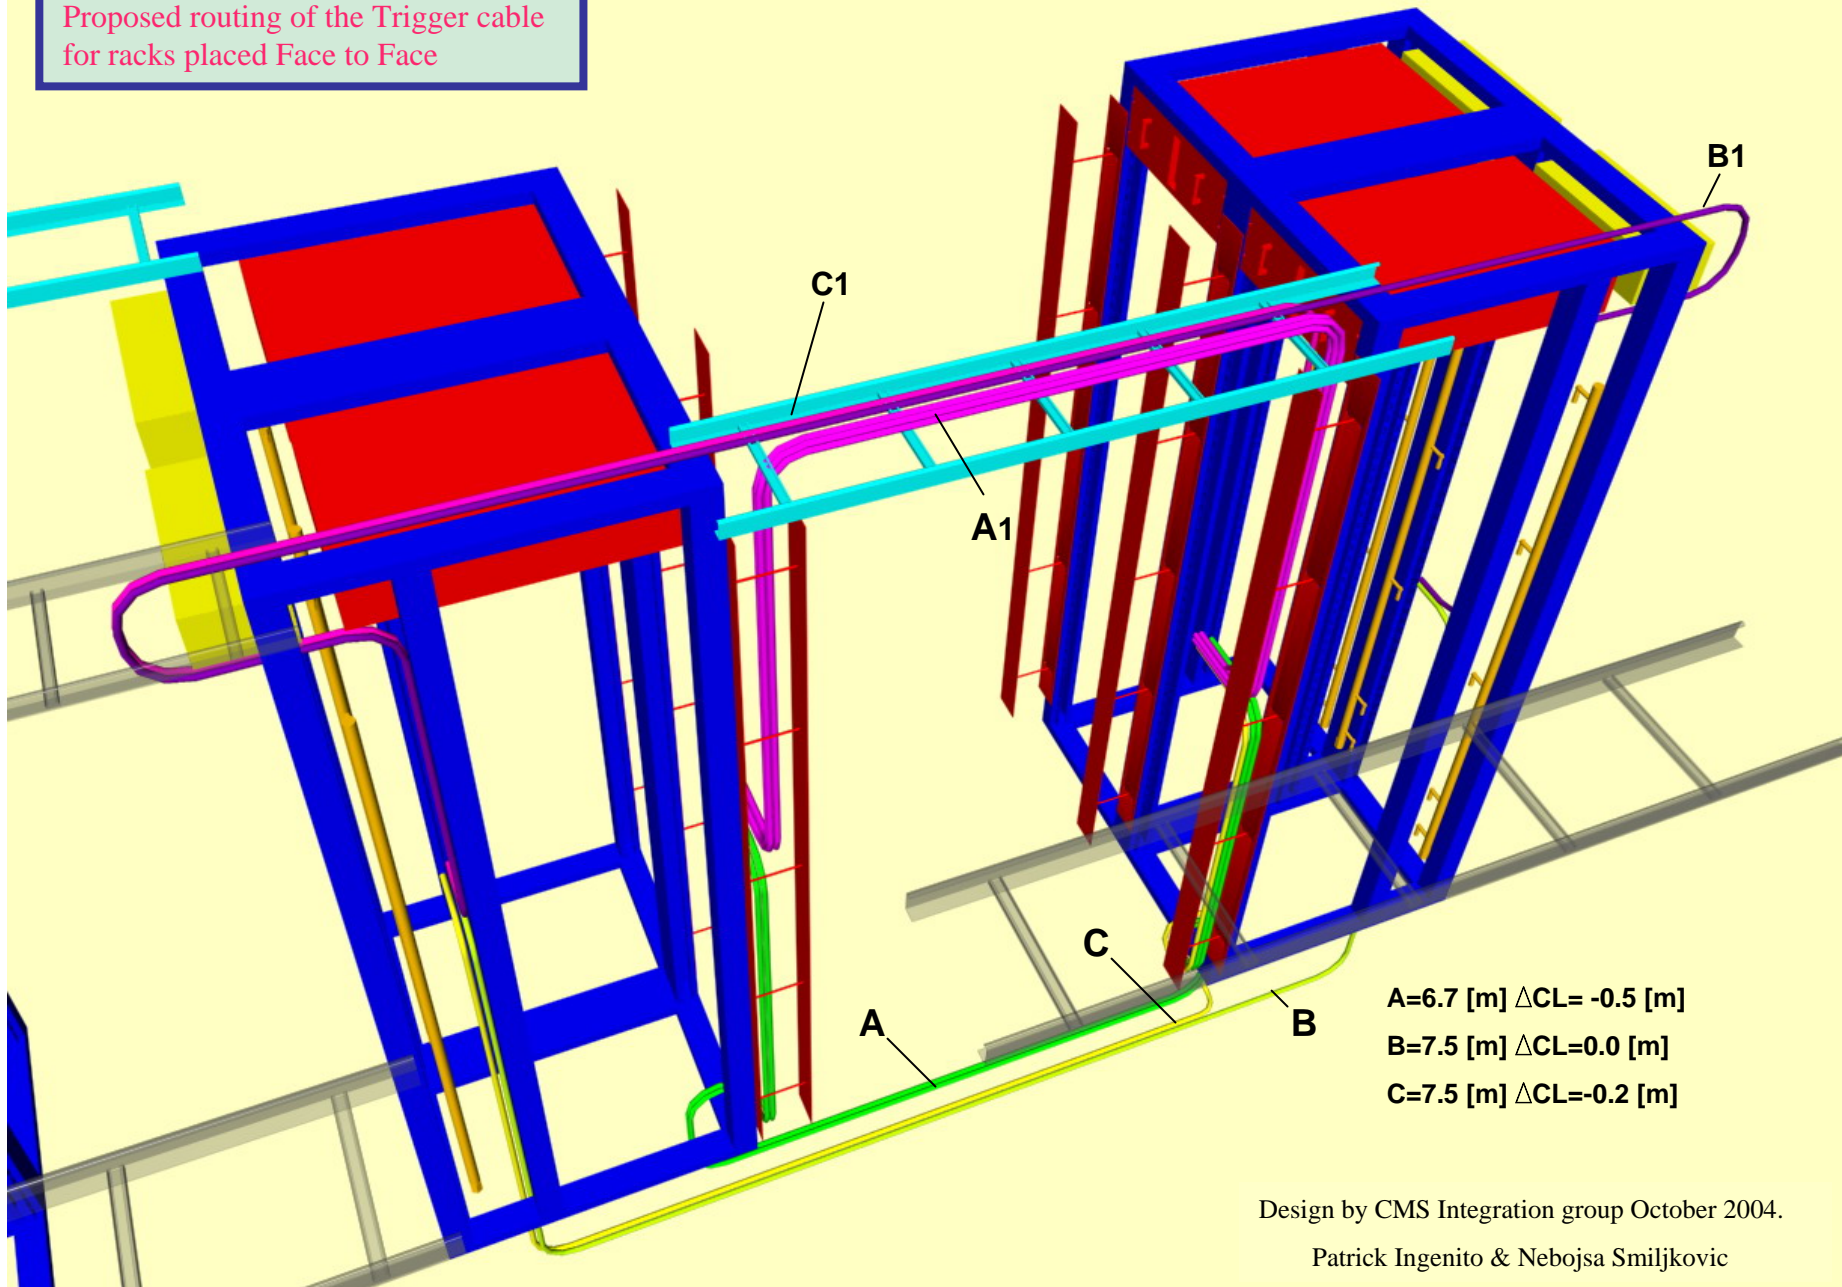

A=6.7 [m] Δ CL= -0.5 [m]


B=7.5 [m] Δ CL=0.0 [m]

C=7.5 [m] Δ CL=-0.2 [m]

Design by CMS Integration group October 2004.

Patrick Ingenito & Nebojsa Smiljkovic


Proposed routing of the Trigger cable for racks placed Back to Back

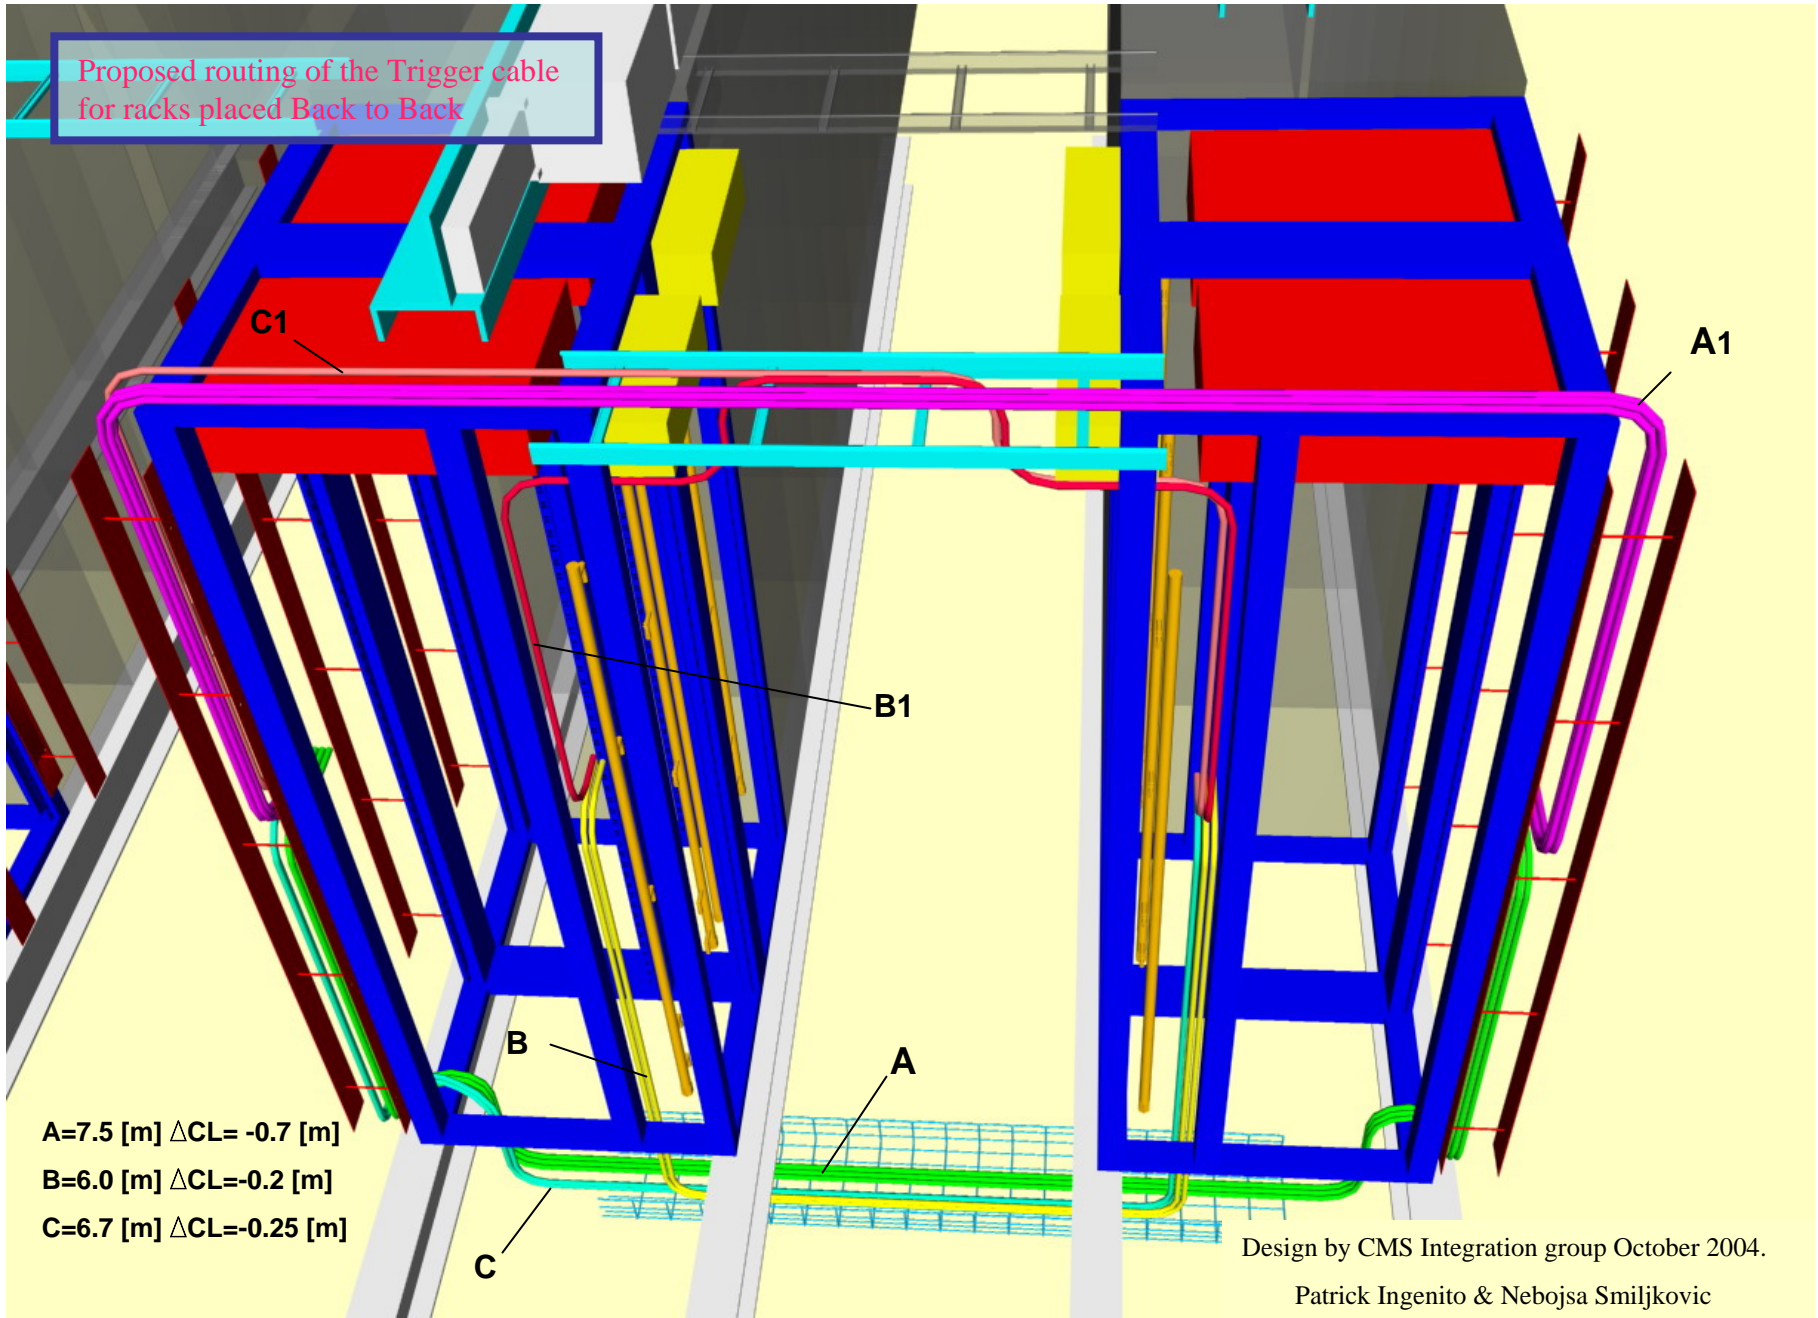

Design by CMS Integration group October 2004.

Patrick Ingenito & Nebojsa Smiljkovic

Interrack connection between two layers

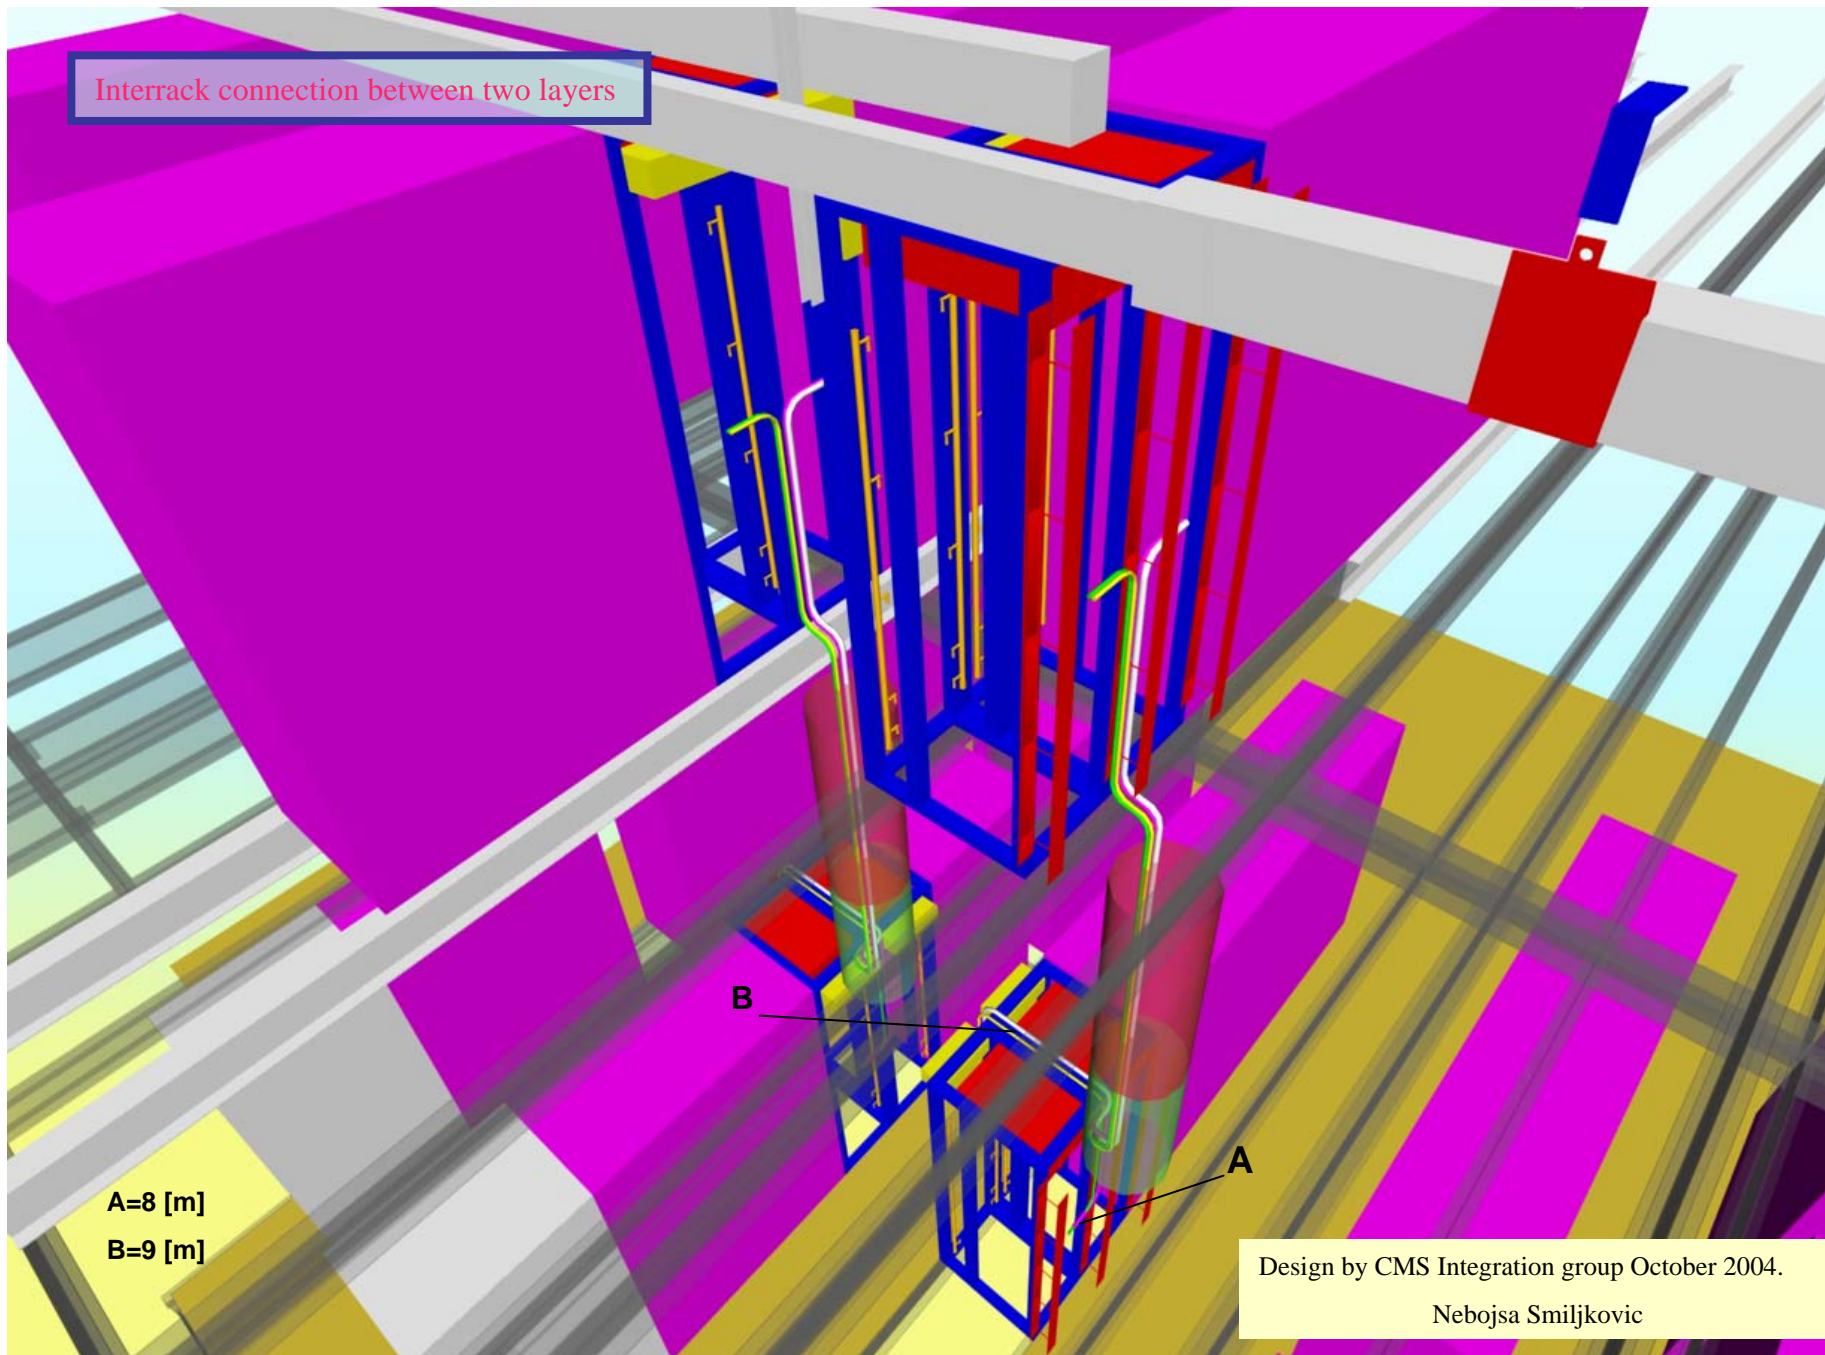

A=8 [m]

B=9 [m]

B

A

Design by CMS Integration group October 2004.

Nebojsa Smiljkovic

